


WL50 – Weather Louvre 50mm Pitch

WL50 louvres offer a greater rigidity than their WL38 counterpart, and therefore are particularly suitable for mid-sized, or unusually shaped units. Just like the WL38, WL50 louvres still offer a 50% free area and excellent resistance to rain ingress in most conditions.

Construction: Variety of extruded aluminium frame styles to choose from.

Unique blade profile

Lengths over 2000mm usually split into sections with a hairline mullion.

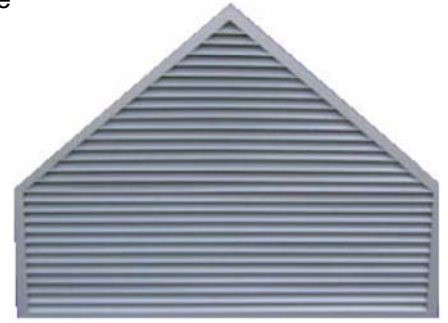

Options & Accessories: M & M Access Ltd can supply a standard 50mm pitch Weather Louvre or a customised grille made to your exact specifications.

Volume Control Damper – Combination units of a WL50 louvre and an adjustable volume control damper of traditional or UPVC construction can be manufactured.

Bird/Insect Mesh – Either type of mesh can be fitted to the rear of a unit to prevent birds, insects or other foreign objects being able to penetrate the louvre.

Finishes – M & M Access Ltd can polyester powder coat or nylon coat your WL50 to any RAL or BS colour, non painted (STD) finish is mill.


Blanking Plate – Blanking plates enable a portion or the entire louvre to be disabled.

Fixings – Countersunk

Fixing Options

Countersunk fixing holes and screws


Louvres can be supplied with countersunk fixing holes already punched into the flange. Screws, powder coated to the same colour as the louvre are supplied as standard.

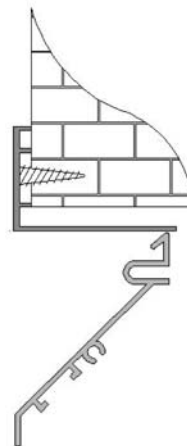

Fixing lugs


Fixing lugs provide a concealed method of affixing a unit to the wall. The lugs protrude from the back of the unit, they can then be bolted to the surrounding masonry, timber or duct. This method does require access to the area behind the louvre for fixing.

With recessed louvres, 'L' brackets will be supplied if fixing lugs are specified.

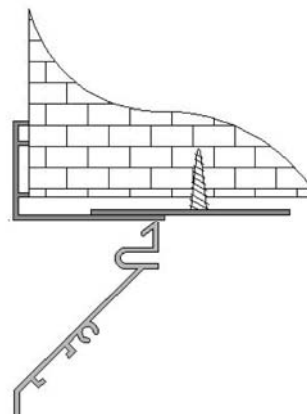


Technical Information


Blade profile & spacing

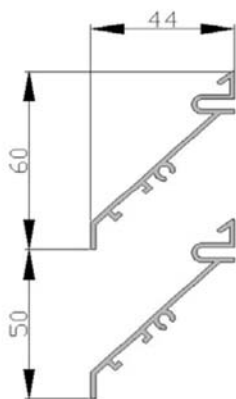


Frame types




25mm flat flange



30mm flat Flange (STD)



50mm flat flange





75mm flat flange


- Free area – Approx 50%.
- WL50 Mass/M² face area = 12.5KG

As standard 30mm flat flange is used on standard format WL50s, 2" x 1" angle is used on reversed and recessed louvres.


- (___ x ___) – WL50

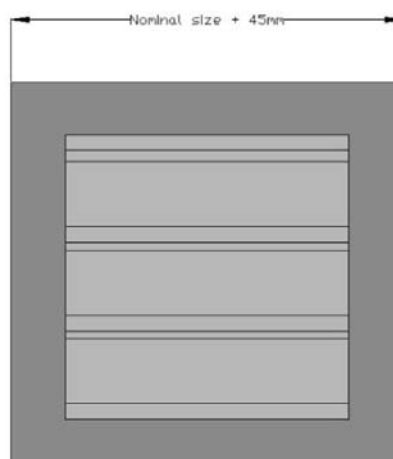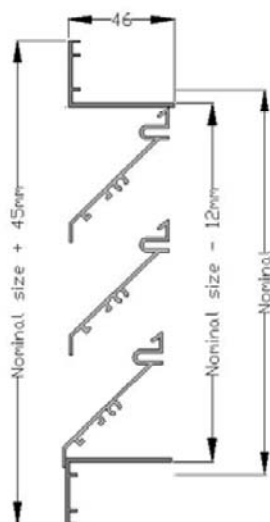

• (___ x ___) – WL50 – Reverse flange

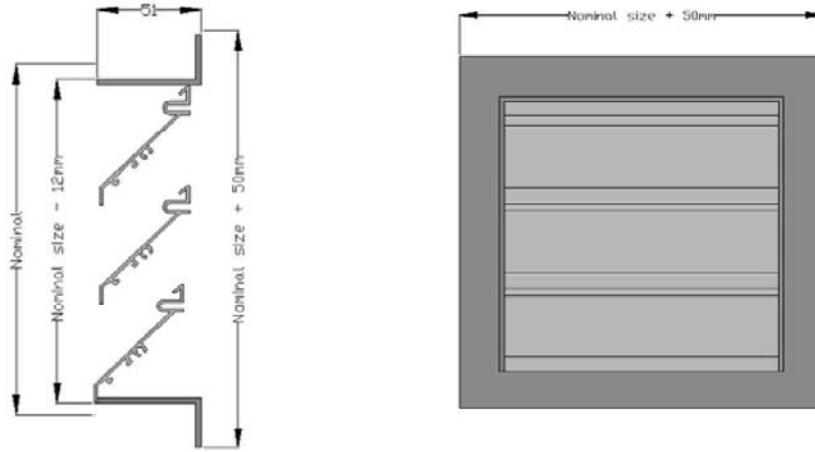


• (___ x ___) – WL50 – Recessed flange

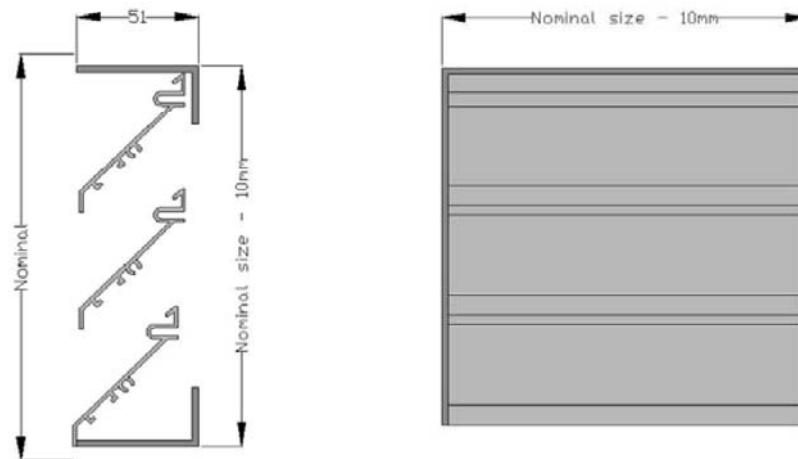

With concealed louvres, lengths of mullion, strong enough to ensure negligible flex in the louvre, run vertically behind the blades to hold them in place, leaving no external frame whatsoever.

• (___ x ___) – WL50 – Concealed

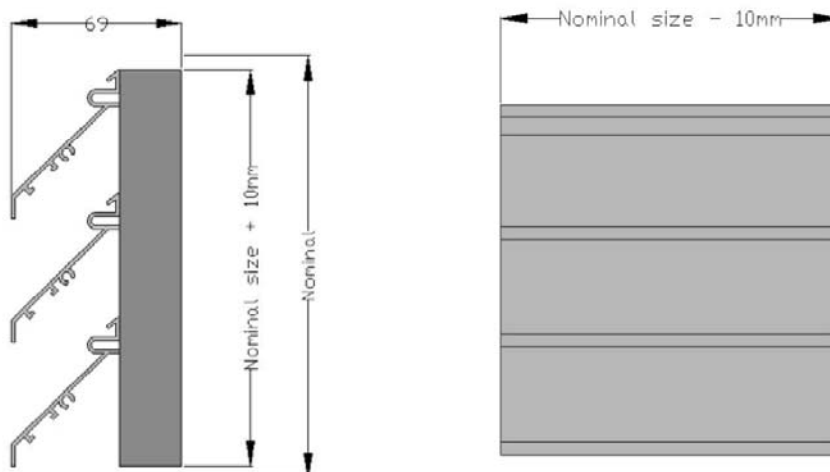

M & M Access Ltd
5 Quarry Park Close
Moulton Park Industrial Estate
Northampton
NN3 6QB
Tel: 01604 644944 Fax: 01604 644899

Email: sales@m-maccess.co.uk

Web: www.m-maccess.co.uk / www.access-panels.com