

M & M ACCESS LTD

THANKYOU FOR DOWN LOADING THIS PRODUCT INFORMATION

Scroll down to view the products data sheets and specifying sheets

If you are specifying this product for a particular project we would kindly appreciate being notified of the details via one of the following methods

Telephone: 01604 751111

Fax: 01604 756666

E-mail: sales@m-maccess.co.uk


We would like to thank you for your valuable time.

M & M Access Ltd
Unit J, KG Business Centre
Kingsfield Close
Kings Heath Industrial Estate
Northampton
NN5 7QS

Circledor – PF / BF

Applications Ceiling Drylined M/F


Picture Frame Non Fire Rated

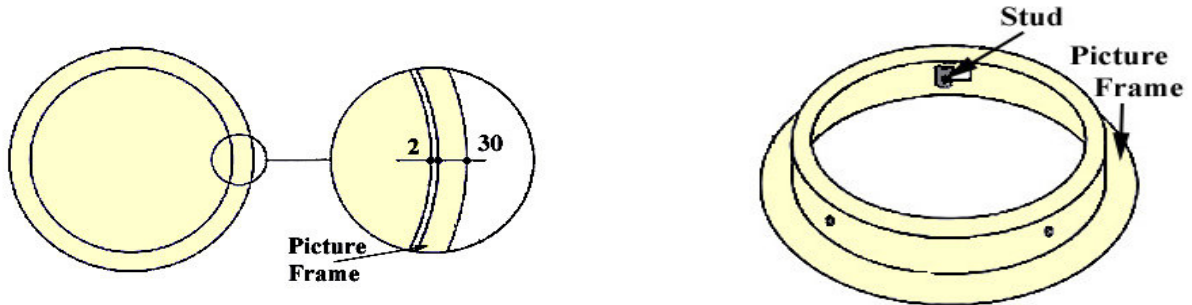

Circular panel comprising of a 30mm wide picture frame surround to give an architrave finished appearance with a removable flush fitted solid face door.
 Door and Frame spun from **1.0mm thick Zintec**.
 Comprising 3 x 6mm diameter steel studs mounted on the frame at 120 degree pitch centres.
 Finished overall polyester powder coated RAL 9010 20% gloss.


Sizes
 Inside Frame Diameter
 300mm Diameter
 450mm Diameter
 600mm Diameter

Beaded Frame Non Fire Rated

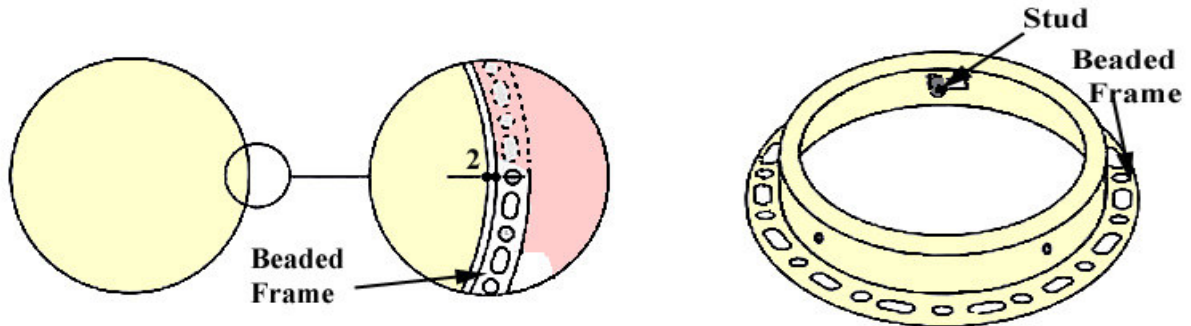


Circular panel comprising of a perforated simulated edge bead surround for tape and joint to give a concealed frame appearance with a removable flush fitted solid face door.
 Door and Frame spun from **1.0mm thick Zintec**.
 Comprising 3 x 6mm diameter steel studs mounted on the frame at 120 degree pitch centres.
 Finished overall polyester powder coated RAL 9010 20% gloss.

Sizes
 Inside Frame Diameter
 300mm Diameter
 450mm Diameter
 600mm Diameter

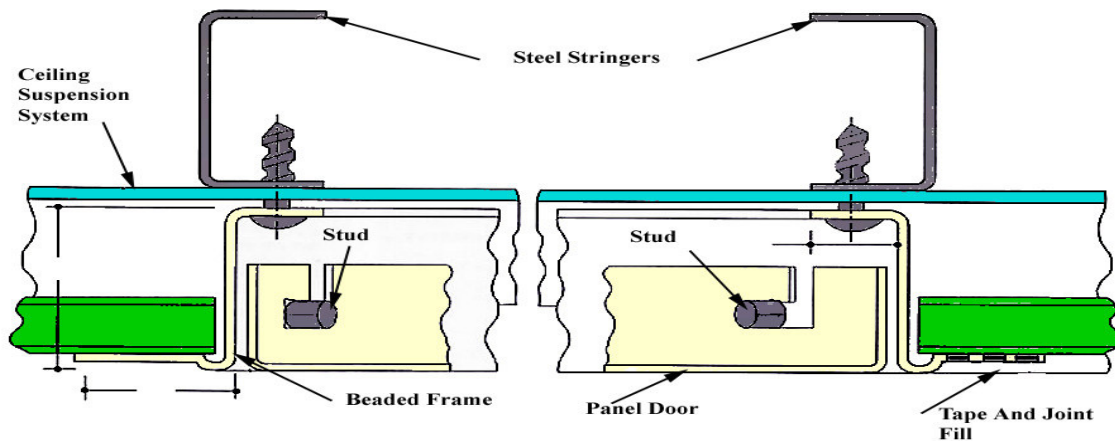

Applications

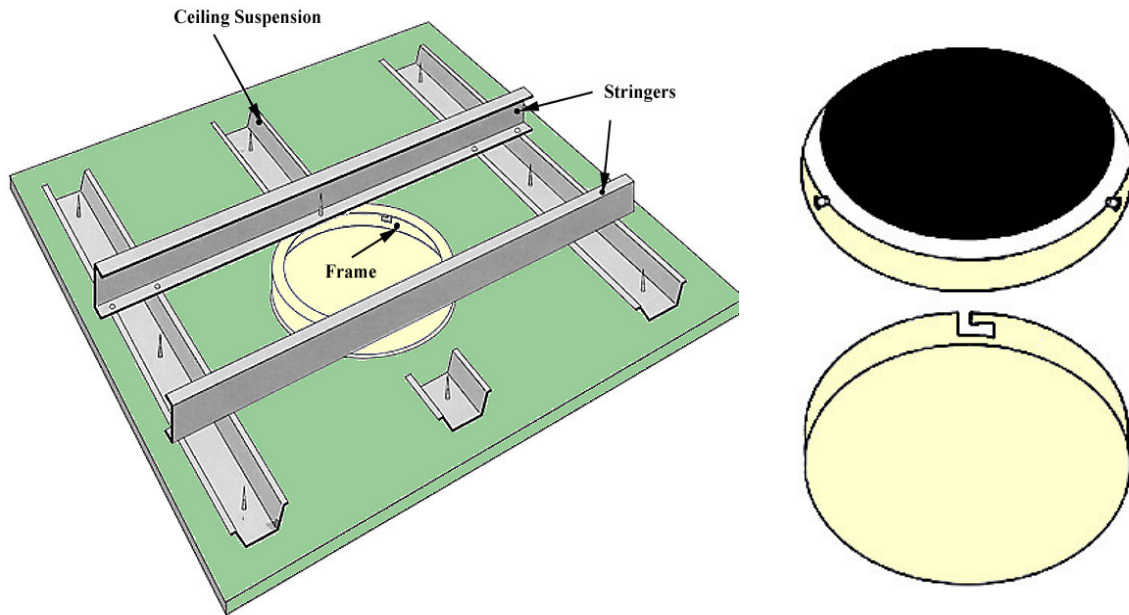

Forming Apertures

- 1) After installation of the ceiling M/F suspension system but before drylining commences the location of the required access points should be determined.
- 2) Span suitable light gauge steel stringers between the suspension system main runners as illustrated, spaced to complement the diameter of panel to be installed.
- 3) Rivert stringers to the main runners.

Operation

Removing the circular door from the frame

- 1) Push firmly on the door face and apply a clockwise force of which will release the door from the frame(s) located studs.
- 2) Support the weight of the door as it is released from the frame.

Re-Inserting the door into the frame

This can be done by simply reversing the above procedure.

Fixing

- 1) Remove door as described in **Operation**.
- 2) Offer frame into the aperture formed at the desired points.
- 3) Self tap screw top flange of the frame to the stringers where they intersect.
- 4) Tighten the fixings to ensure the frame fits flush with the drylining face.
- 5) Insert door into the frame as described in **Operation**.

Availability

24 hour delivery to any UK mainland destination for stock items.

Maintenance

Using a soft damp cloth with an all purpose cleaner wipe over door and frame. Complete the process by wiping over with a chamois leather.

NB: These circular panels can be over painted on site by simply scuffing the surfaces and re-applying desired paint.

Information is correct at time of Print but may be subject to change at management's discretion.

Circledor BF

Circledor panels to be supplied by M & M Access Ltd - Unit J, KG Business Centre,
Kingsfield Close, Kings Heath Industrial Estate, Northampton NN5 7QS
Tel: 01604 751111 Fax: 01604 756666

Circledor BF access panel to be -----mm Diameter
(See below for sizes available)

Manufactured from Zintec / Aluminium (Delete as applicable) complete with hanging slots.
Door and Beaded frame comprising a slot and circular perforated flange detail
finished on visible face polyester powder coated Ral 9010 20% gloss (White).

Panels to be ready for Ceiling installations and fitted according to instructions
supplied by M & M Access Ltd.

Standard Sizes	Options
300mm Diameter	Safety Cord
450mm Diameter	Other Ral/BS Colours
600mm Diameter	

**For Bespoke products please contact
M & M Access Ltd for further assistance.**

Circledor PF

Circledor panels to be supplied by M & M Access Ltd - Unit J, KG Business Centre,
Kingsfield Close, Kings Heath Industrial Estate, Northampton NN5 7QS
Tel: 01604 751111 Fax: 01604 756666

Circledor PF access panel to be -----mm Diameter
(See below for sizes available)

Manufactured from Zintec / Aluminium (Delete as applicable) complete with hanging slots.
Door and Picture frame detail finished on visible face polyester powder coated
Ral 9010 20% gloss (White).

Panels to be ready for Ceiling installations and fitted according to instructions
supplied by M & M Access Ltd.

Standard Sizes	Options
300mm Diameter	Safety Cord
450mm Diameter	Other Ral/BS Colours
600mm Diameter	

**For Bespoke products please contact
M & M Access Ltd for further assistance.**