

# M & M ACCESS LTD

THANKYOU FOR DOWN LOADING THIS PRODUCT INFORMATION

**Scroll down to view the products data sheets and specifying sheets**

**If you are specifying this product for a particular project we would kindly appreciate being notified of the details via one of the following methods**

Telephone: 01604 751111

Fax: 01604 756666


E-mail: [sales@m-maccess.co.uk](mailto:sales@m-maccess.co.uk)

We would like to thank you for your valuable time.

M & M Access Ltd  
Unit J, KG Business Centre  
Kingsfield Close  
Kings Heath Industrial Estate  
Northampton  
NN5 7QS

# Ladders – Stainless Steel or Aluminium


**Ladder / L**

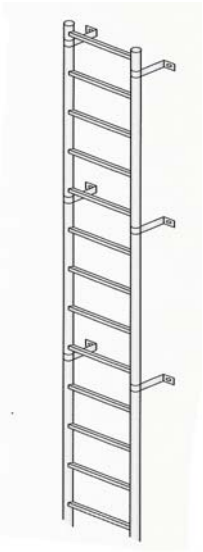

**Mesh Infill**




**Ladder / LW**

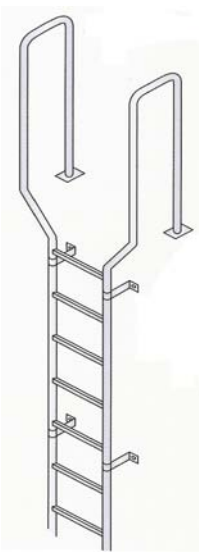

**Ladder / Platform**



**Ladder LWC**

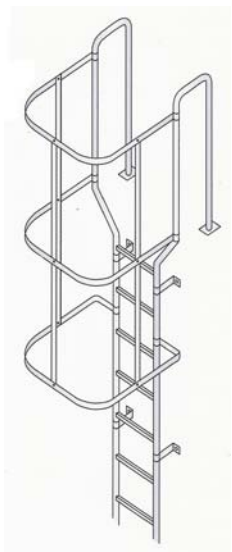

**Ladder / L**  
Standard upright ladder

**Ladder / LW**  
Standard upright ladder with walk through.

**Ladder / LWC**  
Standard upright ladder with walk through and safety hoop.

**Ladder / LC**  
Standard upright ladder with safety hoop

Designed for use where safe, vertical access is required, together with a range of accessories to give choice and flexibility.

Rungs: Cast aluminium Safe Tread ladder rungs set at 250mm centres.  
Stringers: 48mm O/D Structural tube.  
Ladder Width: Standard ladders will have tubular stringers set 400mm apart.

## Safety Hoops

Safety hoops are recommended for ladders where the height exceeds 2500mm.

Specifications: Hoops - 50 x 5mm  
Tie Bar Strips – 30 x 5mm

Security Closures with a lockable gate to the bottom of the ladder to prevent unauthorised entry is available on request.  
Ladder Guards can be supplied in either 2m or 2.5m long of which are mounted directly over the climbing rungs to prevent unauthorised use.

Retractable Hand Hold provides an efficient method of improving the safety and convenience of ladder access and when not in use it can simply be unlatched to slide down adjacent to the ladder beneath.

## Sizes

Height mm	No. Rungs	No. Stays Pairs	Height mm	No. Rungs	No. Stays Pairs
1000	4	2	4000	14	3
1300	5	2	4600	16	3
1600	6	2	5200	18	3
1900	7	2	5800	20	3
2200	8	2	6400	22	4
2500	9	2	7000	24	4
2800	10	2	7600	26	4
3400	12	2	8200	28	4
			8600	30	5

(Other sizes are available on request)

Contact the Sales Office should you require any further information

Information is correct at time of print but may be subject to change at management's discretion.

Optional Extras  
PPC to any standard RAL colour  
MLC – Mesh Lined Hoop  
LCS – Lockable Security Closure  
LG – Ladder guard  
RHH – Retractable Hand Hold

## Standard Ladder

Ladders to be supplied by M & M Access Ltd Unit J, KG Business Centre, Kingsfield Close, Kings Heath Industrial Estate, Northampton NN5 7QS

Tel: 01604 751111 Fax: 01604 756666

Rungs Cast Aluminium Safe Tread set 250mm centres  
Stringers 48mm O/D Structural Tube  
Ladder Width Standard Ladders will have tubular stringers set 400mm apart

Safety Hoop recommended for ladders that exceeds 2500mm in height

Hoops 50 x 5mm  
Tie Bar Strips 30 x 5mm

Manufacture from Stainless Steel / Aluminium (Delete as applicable)

Model Ref Ladder / L to be -----mm High

Model Ref Ladder / LW to be -----mm High

Model Ref Ladder / LWC to be -----mm High

Model Ref Ladder / LC to be -----mm High


(Refer to data sheet for available sizes)

### Optional Extras

LSC (Lockable Security Closure)  
MLC (Mesh Lined Cage)  
LG (Ladder Guard)  
RHH (Retractable Hand Hold)  
PPC (Polyester Powder Coated)

Please contact M & M Access Ltd for further assistance.

See below for further drawings

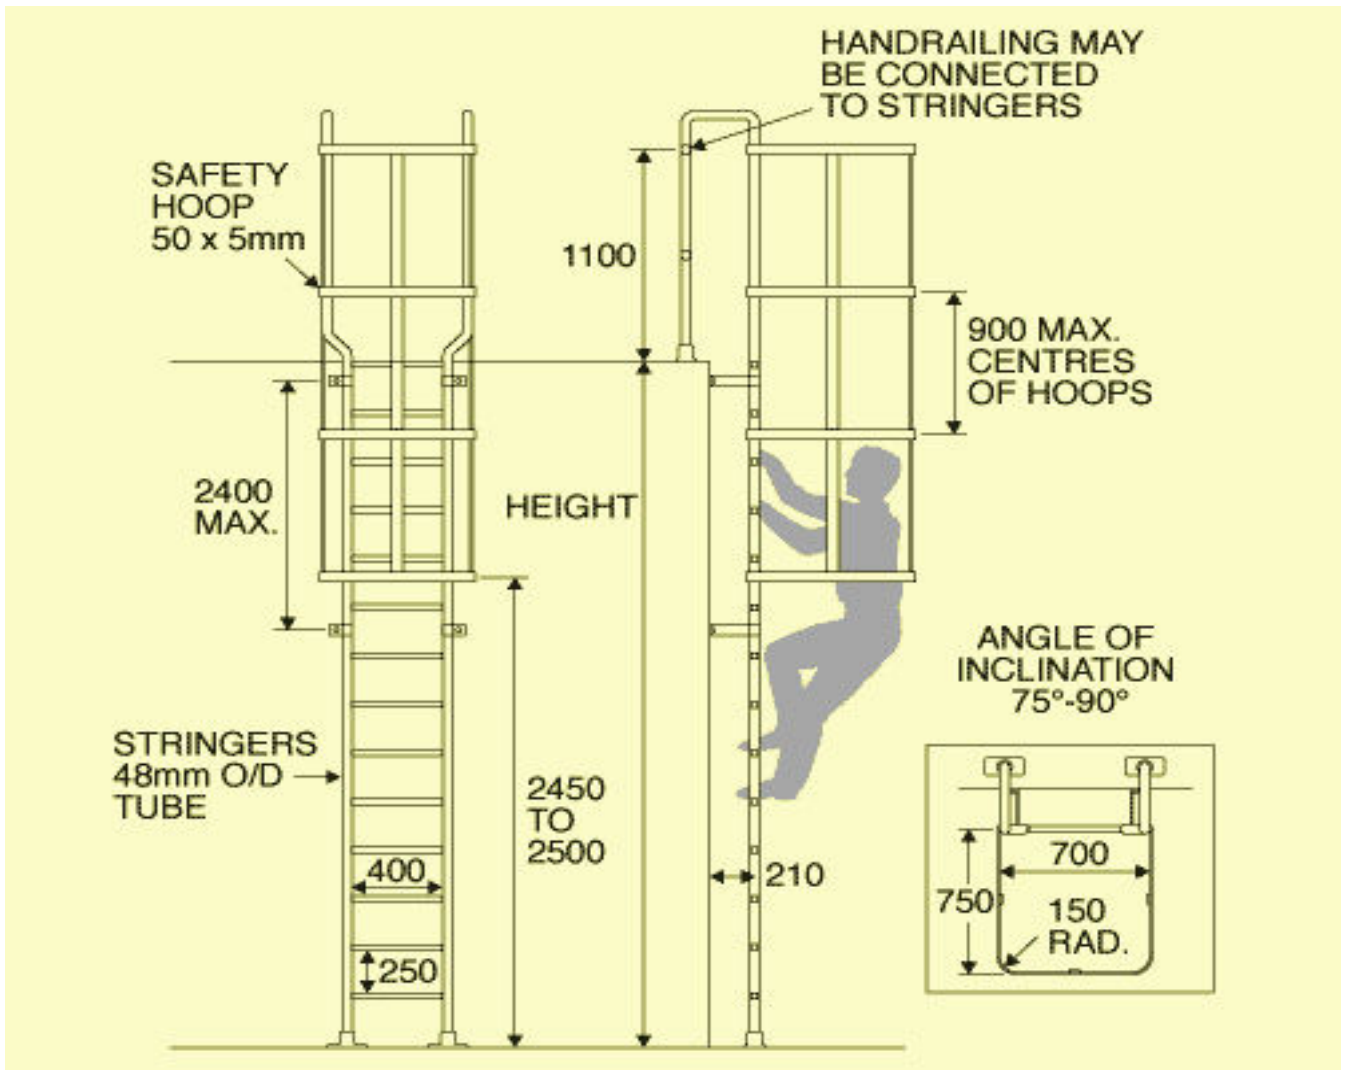

Retractable Hand Hold



Ladder Guard

