



Standdor Metal faced door within a 28mm deep frame

Non – fire rated & Lift out

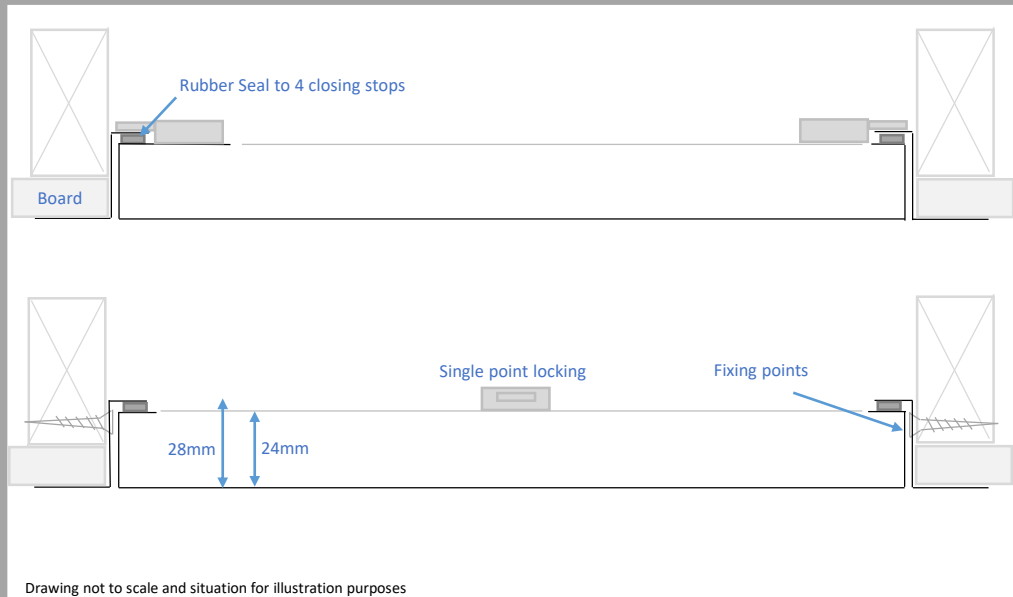

A Beaded frame design is also available for plastered concealed frame finish



Application

Access Panels are designed to conceal and secure areas in walls and ceilings where access is required to electrical, water and maintenance services, concealed behind or above them. It is designed to be fitted within timber stud/joists, concrete blockwork or metal track systems.

There are two frame surround types;

Picture frame surround to give a neat finish around your pre-cut hole opening.

Beaded frame surround to accept a plaster skim to conceal the frame into your plastered wall.

Description

This access panel has a metal faced door and is supplied with a picture frame. The panel is fitted with two **budget locks** as standard.

Materials and finishes

M & M access panels are manufactured from 1.2mm thick Zinc plated mild steel (BS EN 10025) for maximum rigidity. Stainless steel finishes are also available.

The Access panels are painted in a polyester powder coating (BS EN 12206-1:2004) – White - RAL 9010 textured, as standard. This paint texture blends well with your plastered painted walls and can be overpainted with ease. Other colours are available to match your finished area.

Sizing

M & M reference panel size sizing from the inside frame measurement – i.e. 600x600

	Panel Size	Structural opening	Clear opening with door open
Example	600x600	607x607	574x574
Formula	Height	+ 7mm	- 24mm
	Width	+ 7mm	- 24mm

Note: Largest door in this range would be 600x600.

Installation

M & M supply installation instructions in the form of labels on the rear of the doors. The label will have the relevant certification standard that it complies to clearly marked.

As part of our quality system you will also find on the label, the identity mark of the quality inspector, who has done the final checks on your product.