




Circledor – Metal faced within a 50mm deep frame

Non – fire rated

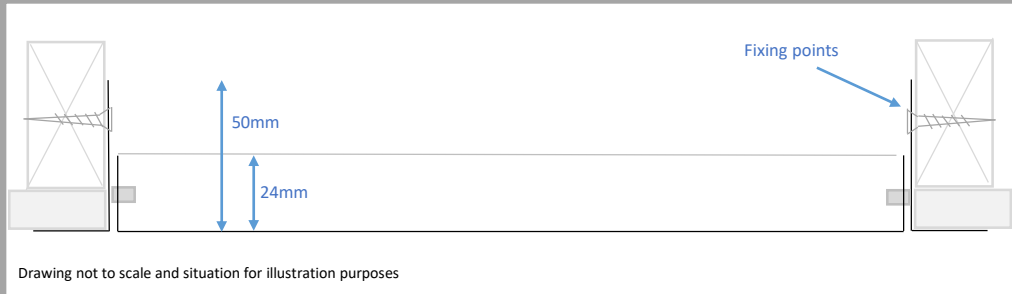

A Beaded frame design is also available for plastered concealed frame finish



Application

Access Panels are designed to conceal and secure areas in walls and ceilings where access is required to electrical, water and maintenance services, concealed behind or above them .

There are two frame surround types;

Picture frame surround to give a neat finish around your pre-cut hole opening.

Beaded frame surround to accept a plaster skim to conceal the frame into your plastered wall.

Description

This access panel has a metal faced door and is supplied with a picture frame. The panel has a simple hinge system for ease and speed of assembly on site with pin location in the frame and a bayonet fitting in the door. The door is also fitted with safety wires as standard to remove the door safely away from the frame.

Materials and finishes

M & M access panels are manufactured from 1.2mm thick Zinc plated mild steel (BS EN 10025) for maximum rigidity. Stainless steel finishes are also available.

The Access panels are painted in a polyester powder coating (BS EN 12206-1:2004) – White - RAL 9010 textured, as standard. This paint texture blends well with your plastered painted walls and can be overpainted with ease. Other colours are available to match your finished area.

Sizing

M & M reference panel size sizing from the inside frame measurement – i.e. 600x600

	Panel Size	Structural opening	Clear opening with door open
Example	600 diameter	607 diameter	600 diameter
Formula		+ 7mm	-
		+ 7mm	-

Installation

Fixing points are pre-punched in the frames for fixing. The circular hole will need supports to the ceiling to fix the access panel to.