


## Griddor – Access panel to suit 15mm exposed grid system for use with tegular mineral tiles fitted on site

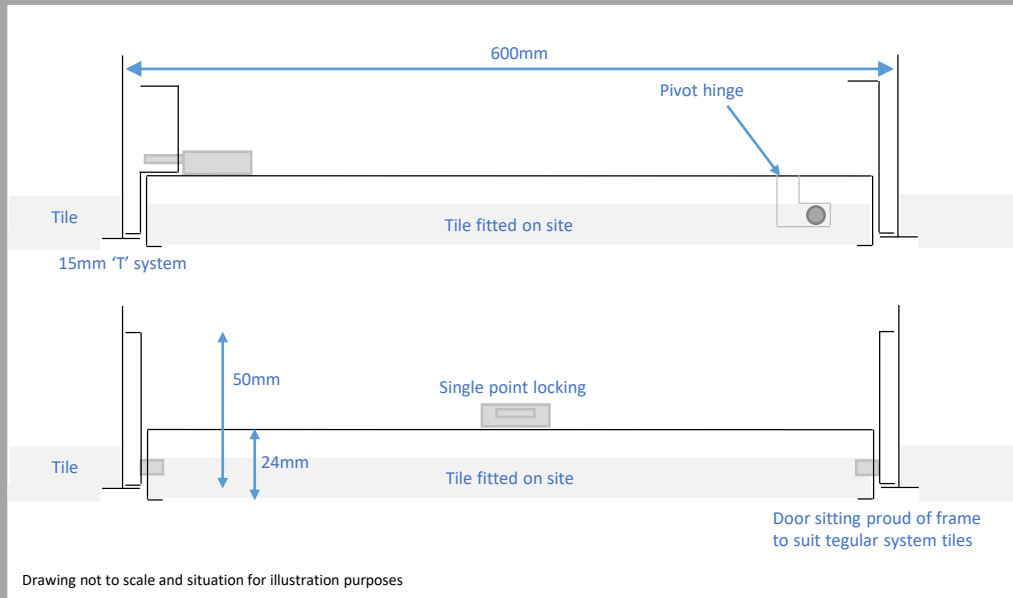

### Application

Access Panels are designed to conceal and secure areas in walls and ceilings where access is required to electrical, water and maintenance services, concealed behind or above them.

### Description

This access panel has been designed to suit the exposed grid system ceiling. It sits within the 'T' system to blend in with the rest of the ceiling system. One edge of the door has a removable cover so as to slide in the mineral fibre tiles being used in the rest of the ceiling. The panel has a simple hinge system for ease and speed of assembly on site with pins in the frame and the door just hooks over into place. The panel is fitted with a **budget lock** as standard, but other locking options are available.

### Materials and finishes

M & M access panels are manufactured from 1.2mm thick Zinc plated mild steel (BS EN 10025) for maximum rigidity. Stainless steel finishes are also available. The Access panels are painted in a polyester powder coating (BS EN 12206-1:2004) – White - RAL 9010 textured, as standard. This paint texture blends well with your plastered painted walls and can be overpainted with ease. Other colours are available to match your finished area.

### Sizing

M & M reference panel size sizing from the inside of 'T' section to 'T' section – i.e. 600x600

	Panel Size	Structural opening	Clear opening with door open
<b>Example</b>	585x585	600x600	
<b>Formula</b>	Height	0	
	Width	0	

Note: Sizing is based on the modular tile sizes and to suit the grid system ie 600x600, 1200x600 etc The 'T' section is replicated to follow the ceiling if supplied over 600mm.

### Other lock types available

- 5mm bit insert into budget locking
- Touch latch
- Castellated tamperproof lock
- Standard keylock

### Installation

M & M supply installation instructions in the form of labels on the rear of the doors. The label will have the relevant certification standard that it complies to clearly marked. Any beaded areas for plaster skim must have scrim tape applied to the area before plastering. As part of our quality system you will also find on the label, the identity mark of the quality inspector, who has done the final checks on your product.