



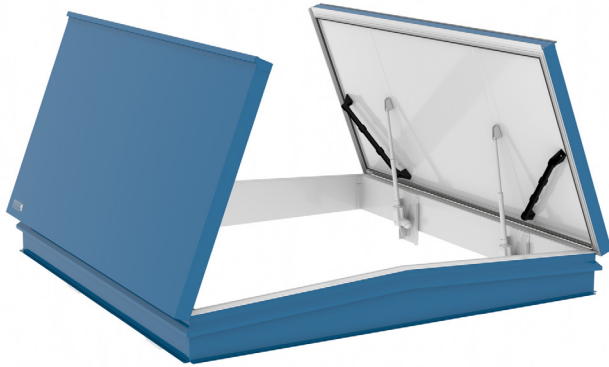

Features

- Thermally broken lid and upstand
- External curb liner
- 75mm polyisocyanurate board (0.26 W/m²K)
- Slam latch with internal and external handles
- Padlock internal and external
- Any colour available

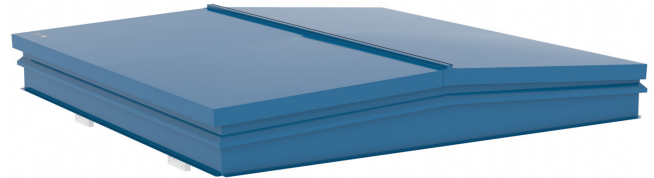

Standard Specification

Material

Cover and frame 2mm aluminium
75mm thermally broken composite lid and upstand.
Aluminium extrusion grade 6063T6
Aluminium sheet grade 1050

Cover

75mm (3") fully insulated kerb and lid, corner welded and reinforced.

Upstand

300mm upstand with external curb liner.
Thermally broken with 75mm insulation and 117mm fixing flange.
Integral weathering lip.

Insulation

75mm Polyisocyanurate (PIR) insulation to 0.26 W/m²K U-value.

Seal

Double unbroken bubble & blade seal to lid.

Operation

Gas spring assisted opening.

Hinge

Heavy duty continuous hinge.

Locking

Heavy duty stainless steel slam latch (LO1)
Internal hasp & staple for padlock (LO2)
External padlockable handle (LO4)
(Padlocks by others)
Hold open safety stay

Finish

Mill finish aluminium



Testing

bre



Resistance to wind
loads (Class A4)



Weathertight
(Class A7)



Tested to Air
Permeability (Class A4)




Water Ingress Test
Water & Solid IPX6 (UKAS)



Dust Ingress Test
IP6X (UKAS)



Ingress Protection
Water & Solid

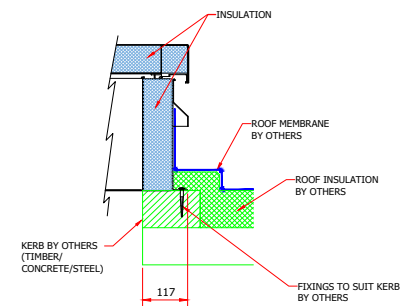

Typical Install