



Features

- CE Marked to EN12101-2
- Double Glazed Lid
- Thermally Broken
- Sizes up to 3000 x 1400mm
- Curb Liner as standard
- Can be installed up to 30° Pitch



Standard Specification

Material

Cover and frame aluminium
50mm thermally broken frame and upstand.
Aluminium extrusion grade 6063T6
Aluminium sheet grade 1050

Glazing:

35.5mm sealed double glazed unit will comprise Pilkington 6mm toughened K polished all round outer pane, 20mm warm edge silver spacer bar argon filled, Pilkington 9.5mm toughened and laminated inner pane. Frameless, infinity glass with black border.

Upstand

300mm (12") in height with external curb liner, thermal break and 50mm polyisocyanurate insulation to 0.43 W/m²K U-value.

Insulation

50mm Polyisocyanurate (PIR) insulation to 0.43 W/m²K U-value.

Seal

Double unbroken seal to lid.

Operation

24V DC/10A (max) actuator with electro-magnetic locking
Tested to EN12101-2.
Actuator can optionally be supplied concealed.

Hinge

Heavy duty continuous hinge.

Controls

24V control centre
Fireman's switch
Key switch
Push button
Smoke detector

Finish




Mill finish aluminium
Powder Coating Optional Extra



Performance

Product Codes	Standard Sizes*			Actuator	Geometric Area Approved Document B (Without Wind Deflectors)	Aerodynamic Area EN12101-2 (With Wind Deflectors)
SRHG-AOV/105.105	1050	X	1050	Single	1.03m ²	0.73m ²
SRHG-AOV/125.125	1250	X	1250	Single	1.56m ²	0.93m ²
SRHG-AOV/150.120	1500	X	1200	Single	1.80m ²	1.12m ²
SRHG-AOV/200.120	2000	X	1200	Twin	2.40m ²	1.58m ²
SRHG-AOV/240.140	2400	X	1400	Twin	3.36m ²	2.08m ²
SRHG-AOV/300.180	3000	X	1400	Twin	4.20m ²	2.60m ²

*Bespoke sizes available

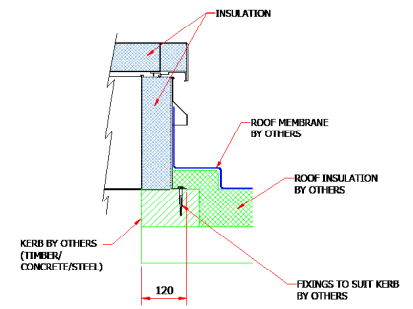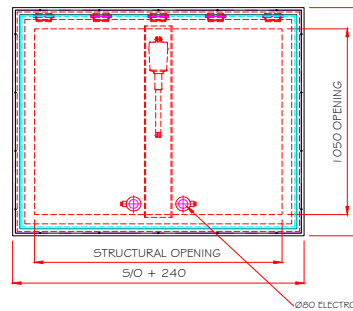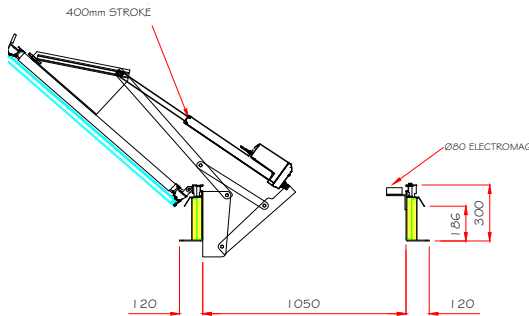

Typical Install

Options



Wind Deflectors
Improved Airflow




Hidden Actuators
from below

Other Options:

- Bespoke sizes available
- Can be installed up to 30° Pitch
- Extended Cap & Flashing
- Single or twin polyester powder coating

Ladder-Up Post



Sureguard Handrail



Fixed Handhold



Cap & Flashing



Ladder Arrangements

ZIP Retractable Ladders



[Roof Hatch + ZIP Ladder](#)

Fixed Vertical Ladders



[Roof Hatch + Vertical Ladder](#)