



■ Features

- Thermally broken lid and upstand
- External curb liner
- Fire rated from the underside only for up to 240 minutes to EN 1634-4 and UL-EU certified
- 60/90/120/240 Minutes Available to integrity
- Gas spring assisted opening to 85°
- 50mm PIR insulation (0.43 W/m²K) as standard.
Mineral wool insulation (0.63 W/m²K) available at no extra cost.



Specification

■ Material

Cover and upstand manufactured in aluminium with galvanised steel cladding to underside of lid.

■ Cover

Single or double leaf cover supported by heavy duty hinges and features an integral wrap over edge, incorporating double seals.

■ Upstand

300mm upstand with external curb liner.
Thermally broken with 50mm insulation and 149mm fixing flange.
Integral weathering lip.

■ Insulation

50mm Polyisocyanurate (PIR) insulation to 0.43 W/m²K U-value.
Mineral wool insulation (0.63 W/m²K) available at no extra cost.

■ Seal

Double EPDM seal

■ Operation

Gas spring assisted opening.



■ Hinge

Heavy duty continuous hinge.

■ Locking

Heavy duty stainless steel slam latch (LO1)
Internal hasp & staple for padlock (LO2)
External padlockable handle (LO4)
(Padlocks by others)
Hold open safety stay



■ Finish

Mill finish aluminium

Product Codes	Standard Sizes*			Weights
SRHTB/FR/60.60	600	x	600	120kg
SRHTB/FR/75.75	750	x	750	150kg
SRHTB/FR/75.90	750	x	900	175kg
SRHTB/FR/90.90	900	x	900	180kg
SRHTB/FR/100.100	1000	x	1000	200kg
SRHTB/FR/120.120	1200	x	1200	250kg
SRHTB/FR/150.75	1500	x	750	225kg
SRHTB/FR/250.75	2500	x	750	320kg

*Bespoke sizes available



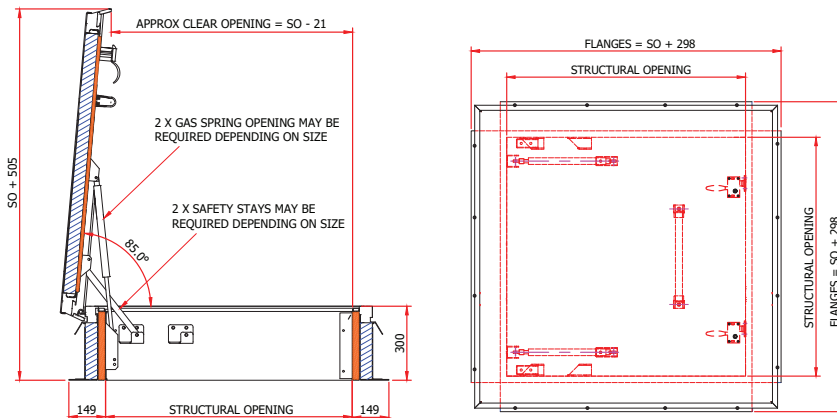

Typical Install

Options

Free of Charge:



Non-Combustible
Mineral Wool Insulation




Wind Restraint

Other Options:

- Electric Opening
- Concealed Actuator
- Fire Rated up to 4 hours
- Acoustic Rating up to 45dB
- Double Door (90 Minutes)
- Walk On Top
- Pitched Roof Installation
- Extended Cap & Flashing
- Single or twin polyester powder coating

Ladder-Up Post



Sureguard Handrail



Fixed Handhold



Safety Grid



Ladder Arrangements

ZIP Retractable Ladders



[Roof Hatch + ZIP Ladder](#)

Fixed Vertical Ladders



[Roof Hatch + Vertical Ladder](#)

Companionway



[Roof Hatch + Companionway Ladder](#)